

The Shure logo is displayed in a stylized, italicized font within a black rectangular box.

**A400MB**  
MUTE BUTTON

## FLEXIBLE CONTROL

CONFIGURABLE MUTE BUTTON ACCESSORY  
COMPATIBLE WITH SHURE MICROFLEX LOW PROFILE BOUNDARY  
AND MODULAR GOOSENECK MICROPHONES


The Shure A400MB mute button accessory adds local or remote mute control via a programmable button for use with the Microflex MX395-LED low profile boundary microphones and MX400SMP-compatible modular gooseneck microphones (MX405/MX410/MX415). With an unobtrusive design ideal for surface mounting into boardroom tables, the A400MB adapter converts the 5-pin XLR output to a standard block connector for easy, no solder termination and hassle-free installation.

## FEATURES

- Configurable as toggle, push-to-talk and push-to-mute functionality
- Onboard programmable switches configure logic settings, LED, and mute button behavior, including touch surface sensitivity
- When used with Shure's ANI4IN\* or ANI22\* and P300-IMX, provides mute synchronization with Microsoft Teams and Zoom (\*-BLOCK versions only)
- Compatible with third-party control systems
- Included color rings to match black, aluminum or white finish microphones
- Requires a 48 V phantom power source
- Easy table installation in 1 1/8" (30mm) hole
- Available A400MB-MOUNT accessory for remote mounting of plug-on adapter

A400MB installed with A400MB-MOUNT



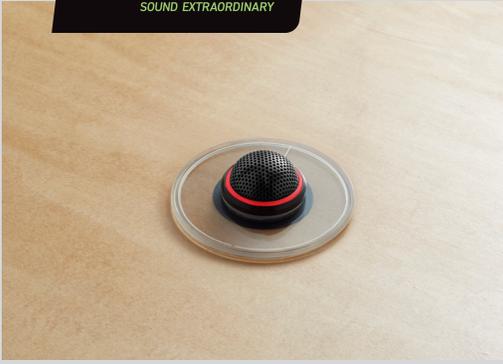

## SPECIFICATIONS

<b>Connector Type</b>	6-pin block connector	
<b>Power Requirements</b>	Phantom power	
<b>Power Consumption</b>	15 mW, maximum	
<b>Weight</b>	113 g (0.25 lbs)	
<b>Output Configuration</b>	Active balanced	
<b>Logic Connections</b>	LED in	Active low ( $\leq 1.0V$ ), TTL compatible. Absolute maximum voltage: -0.7V to 50V.
	Switch out	Active low ( $\leq 0.5V$ ), sinks up to 20mA, TTL compatible. Absolute maximum voltage: -0.7V to 24V (up to 50V through 3k $\Omega$ ).
<b>Dimensions</b>	Base	3.74 x 3.74 x 1.06 in. (94.96 x 94.96 x 27.04 mm) H x W x D
	Mute button	1.54 x 1.54 x 0.2 in. (39.02 x 39.02 x 5.02 mm) H x W x D
	Mute button tube	0.87 x 0.87 x 3.03 in. (22 x 22 x 76.98 mm) H x W x D
	Grommet	1.97 x 1.97 x 0.31 in. (49.97 x 49.97 x 8 mm) H x W x D
	Spacer	1.93 x 1.93 x 0.05 in. (49 x 49 x 1.2 mm) H x W x D

## INCLUDED

- Mute button
- Plug-on adapter
- Spacer
- Color rings (3)
- Assembly kit (90A48840):  
Flathead screwdriver
- Cable ties (2)
- Strain reliefs (2)
- Terminal plug

