

# DTP T EU 4K 231

DTP TRANSMITTER FOR EU-TYPE  
JUNCTION BOXES

**DTP**  
SYSTEMS

**4K UHD**



The Extron DTP T EU 4K 231 is a compact transmitter for sending HDMI up to 230 feet (70 meters) over a shielded CATx cable to Extron DTP®-enabled products. The DTP transmitter is compatible with standard one-gang EU-type junction boxes for convenient installation in wall mount environments. The HDCP-compliant transmitter features a convenient one-gang form factor that offers maximum placement flexibility.

- ▶ Designed to mount in a one-gang EU-type electrical junction box
- ▶ Transmits HDMI up to 230 feet (70 meters) over a shielded CATx cable
- ▶ Supports computer and video resolutions up to 4K
- ▶ Supported HDMI specification features include data rates up to 10.2 Gbps, Deep Color up to 12-bit, 3D, and HD lossless audio formats
- ▶ DTP® output is compatible with HDBaseT-enabled devices
- ▶ HDCP 2.2 compliant
- ▶ Supports multiple embedded audio formats
- ▶ Supports EDID and HDCP transmission
- ▶ Remote power capability
- ▶ Compatible with all DTP 230 Series receivers and DTP-enabled products
- ▶ Extron XTP DTP 24 shielded twisted pair cable is strongly recommended for optimal performance



**Extron Electronics**  
INTERFACING, SWITCHING AND CONTROL


## DESCRIPTION

The Extron **DTP T EU 4K 231** is a compact transmitter for sending HDMI signals up to 230 feet (70 meters) over a shielded CATx cable to Extron DTP-enabled products. The transmitter is compatible with standard one-gang EU-type junction boxes for convenient installation in wall mount environments. The DTP T EU 4K 231 supports video signals at resolutions up to 4K. It features a front panel LED indicator for power and signal presence, and compatibility with HDBaseT-enabled devices. Designed for DTP Systems, the DTP T EU 4K 231 can be remotely powered by Extron. DTP CrossPoint® matrix switchers or other DTP-enabled products. The one-gang design provides maximum space efficiency and the convenience of placing input connections precisely where they are needed.

## KEY FEATURES

- ▶ Designed to mount in a one-gang EU-type electrical junction box
- ▶ Transmits HDMI up to 230 feet (70 meters) over a shielded CATx cable
- ▶ Supports computer and video resolutions up 4K
- ▶ HDCP 2.2 compliant
- ▶ DTP output is compatible with HDBaseT-enabled devices
- ▶ Remote power capability

## APPLICATION DIAGRAM

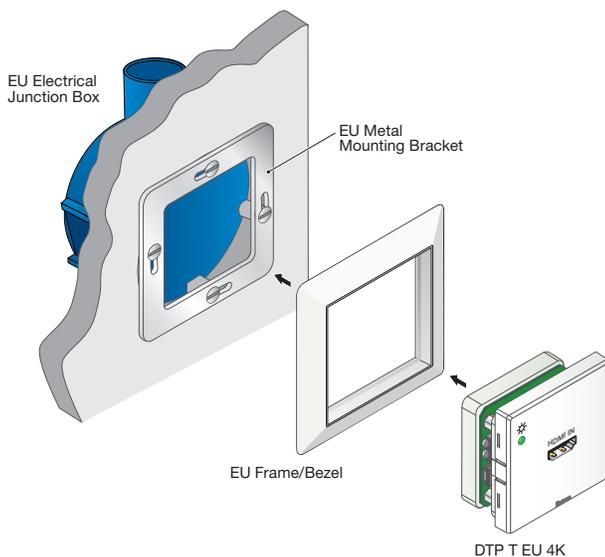

## SPECIFICATIONS

TRUE 4K SPECIFICATION		
Max. 4K Capabilities		
Resolution and Refresh Rate	Chroma Sampling	Max Bit Depth per Color
4096 x 2160 at 30 Hz 3840 x 2160 at 30 Hz	4:4:4	8 bit
4096 x 2160 at 60 Hz 3840 x 2160 at 60 Hz	4:2:0	8 bit
Frame rate <sup>1</sup>	24, 25, 30, 50, or 60 fps	
Chroma sampling <sup>1</sup>	4:4:4, 4:2:2, or 4:2:0	
Color bit depth <sup>1</sup>	8 bits per color	
Signal type	HDMI 1.4, HDCP 2.2, 2.0, 1.4	
Max. video data rate	10.2 Gbps (3.4 Gbps per color)	
<b>NOTE:</b> <sup>1</sup> Subject to the maximum data rate limit. Use our calculator at <a href="http://www.extron.com/4Kdata">www.extron.com/4Kdata</a> to determine video parameters supported by this data rate.		
VIDEO INPUT		
Connector	1 female HDMI type A	
INTERCONNECTION BETWEEN TRANSMITTER AND RECEIVER		
Connector	1 female RJ-45	
Signal transmission distance	1080p @ 60 Hz Up to 230' (70 m) using shielded twisted pair (STP) cable or XTP DTP 24 cable	
	4K/UHD @ 30 Hz Up to 130' (40 m) using shielded twisted pair (STP) cable or XTP DTP 24 cable	
Cable requirements	Solid conductor, 24 AWG or better	
<b>NOTE:</b> Extron XTP DTP 24 shielded twisted pair cable is strongly recommended for optimal performance.		
<b>NOTE:</b> Output mode signaling: DTP: HDMI with embedded audio and remote power HDBaseT: HDMI with embedded audio		
GENERAL		
Power supply	External Input: 100 to 240 VAC, 50-60 Hz Output: 12 VDC, 1 A, TBD watts	
Mounting	Mounts to 1-gang enclosures with 60 mm mounting centers.	
Enclosure dimensions	Frame 3.17" H x 3.17" W x 0.40" D (1-gang) (80.5 mm H x 80.5 mm W x 10.1 mm D) Device module 2.17" H x 2.17" W x 1.52" D (55.0 mm H x 55.0 mm W x 38.4 mm D) Fits mounting frames that accept 55 mm x 55 mm modules. (Allow at least 1.9" [47 mm] in the junction box for device plus cable clearance.)	
Regulatory compliance	Safety CE, c-UL, UL EMI/EMC CE**, C-tick, FCC Class A**, ICES, VCCI Environmental Complies with the appropriate requirements of RoHS, WEEE.	
<b>Model</b>	<b>Version Description</b>	<b>Part number</b>
DTP T EU 4K 231	HDMI EU Tx - 230 feet (70 m)	60-1532-12

For complete specifications, please go to [www.extron.com](http://www.extron.com)  
Specifications are subject to change without notice.

### WORLDWIDE SALES OFFICES

Anaheim • Raleigh • Silicon Valley • Dallas • New York • Washington, DC • Toronto • Mexico City • Paris • London • Frankfurt  
Stockholm • Amersfoort • Moscow • Dubai • Johannesburg • Tel Aviv • Sydney • Melbourne • New Delhi • Bangalore  
Singapore • Seoul • Shanghai • Beijing • Hong Kong • Tokyo

[www.extron.com](http://www.extron.com)