

# MLC Plus 84 D

## MEDIALINK PLUS CONTROLLER DECORATOR-STYLE WALLPLATE



The MLC Plus 84 D is an easy-to-use, two-gang Ethernet controller that controls common AV functions such as power, input switching, and volume. As part of the new MediaLink® Plus Series, the MLC Plus 84 D is designed with more powerful features and enhanced security. It supports Ethernet control of a wide range of AV devices and features a variety of ports and inputs, including a remote volume control port for use with select Extron amplifiers. The MLC Plus 84 D mounts in a two-gang junction box, and includes a white decorator-style wallplate.

- ▶ Manage, monitor, and control AV devices using a standard Ethernet network
- ▶ Fully configurable using Global Configurator Plus or Global Configurator Professional
- ▶ Two bidirectional RS-232 ports
- ▶ Two relays for controlling room functions
- ▶ One IR port for connecting up to two emitters
- ▶ Remote volume control port for Extron MPA Series and select XTRA™ Series amplifiers
- ▶ Volume control buttons with LEDs for visual feedback
- ▶ One digital input
- ▶ Supports Ethernet-controllable devices
- ▶ Customizable backlit buttons
- ▶ Section 508 Compliant
- ▶ Supports Power over Ethernet
- ▶ PoE injector or power supply sold separately



## DESCRIPTION


The **MLC Plus 84 D** is an easy-to-use, two-gang Ethernet controller designed for use in single display AV systems. It features eleven backlit soft touch buttons, two bidirectional serial ports, an IR port, two relays, one digital input, and a remote volume control port. Power over Ethernet allows the controller to receive power and communications over a single Ethernet cable.

The MLC Plus 84 D is configured using Extron GC Plus or GC Pro software. It also integrates seamlessly with Extron's award-winning GlobalViewer® Enterprise software for complete AV resource monitoring, management, and control over a computer network. The Extron Control App and Extron Control for Web is supported by this controller if a secondary point of control is required.

## KEY FEATURES

- ▶ Manage, monitor, and control AV devices using a standard Ethernet network
- ▶ Two bidirectional RS-232 ports
- ▶ Two relays for controlling room functions
- ▶ Remote volume control port for Extron MPA Series and select XTRA™ Series amplifiers
- ▶ One Digital input
- ▶ Supports Ethernet-controllable devices

## APPLICATION DIAGRAM

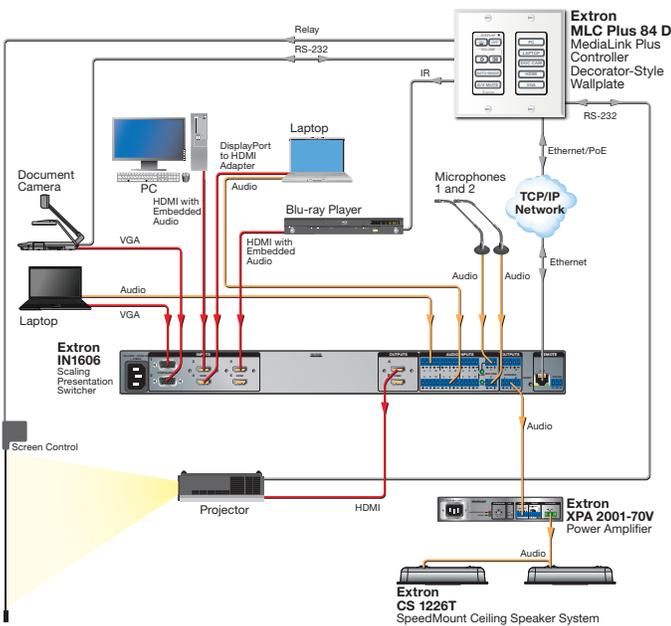

## SPECIFICATIONS

MEMORY		
Flash	512 MB	
SOFTWARE AND CONTROL OPTIONS		
Software	Extron Global Configurator Plus and Professional for Windows®	
Control options	GlobalViewer®, Extron Control	
ETHERNET CONTROL		
Connector	1 female RJ-45 connector	
Data rate	10/100/1000Base-T, half/full duplex with autodetect	
SERIAL CONTROL		
Quantity/type	2 bidirectional RS-232	
DIGITAL INPUT CONTROL		
Quantity/type	1 digital input	
IR CONTROL		
Quantity/type	1 TTL level (0 to 5 V) infrared (carrier and non-carrier) up to 300 kHz	
RELAY CONTROL		
Quantity/type	2 normally open relays	
VOLUME CONTROL		
Quantity/type	1 volume control (compatible with select Extron amplifiers)	
Control voltage output range	0 to +10 VDC (±0.2 volts), adjustable	
GENERAL		
Power supply	Not included	
Power input requirements	12 VDC, 1 A, 12 watts, max. Or power over Ethernet (PoE) (complies with PoE 802.3af, class 3)	
Power consumption	Device 3.1 watts, 12 VDC	
Enclosure dimensions		
Faceplate	Fits the openings in a 2 gang decorator-style wallplate.	
Device	2.8" H* x 3.6" W x 1.6" D (7.1 cm H* x 9.1 cm W x 3.9 cm D) (Depth excludes buttons. Fits most 2 gang US boxes or mud rings. Allow at least 1.8" [4.6 cm] depth in the wall or furniture.) *Overall height is 4.1" (10.4 cm) including mounting tabs.	
Product weight	0.4 lbs (0.2 kg)	
Regulatory compliance		
Safety	CE, c-UL, UL	
EMI/EMC	CE, C-tick, FCC Class A, ICES, VCCI	
Environmental	Complies with the appropriate requirements of RoHS, WEEE	
Accessibility	Complies with the appropriate requirements of Section 508 of the Rehabilitation Act (29 U.S.C. 794d).	
Warranty	3 years parts and labor	
Model	Version Description	Part number
MLC Plus 84 D	White - Decorator-Style Wallplate	60-1194-03
Optional Accessories		
XTP PI 100	Single Port Power Injector	60-1233-01
PS 1210 C	12V, 1A, Captive Screw Connector	70-775-01

For complete specifications, please go to [www.extron.com](http://www.extron.com)  
Specifications are subject to change without notice.

### WORLDWIDE SALES OFFICES

Anaheim • Raleigh • Silicon Valley • Dallas • New York • Washington, DC • Toronto • Mexico City • Paris • London  
Frankfurt • Madrid • Stockholm • Amersfoort • Moscow • Dubai • Johannesburg • Tel Aviv • Sydney • Melbourne  
Bangalore • Mumbai • New Delhi • Singapore • Seoul • Shanghai • Beijing • Hong Kong • Tokyo

[www.extron.com](http://www.extron.com)