

TLP Pro 725M

7" WALL MOUNT TOUCHLINK PRO TOUCHPANEL



The Extron TLP Pro 725M is a 7" wall mount TouchLink® Pro Touchpanel with many enhanced features. Extron redesigned this latest TouchLink Pro Touchpanel inside and out with a new, high-performance quad-core processor, eight times more memory, a higher resolution, 1024x600 edge-to-edge glass capacitive touchscreen built with scratch and smudge-resistant Corning® Gorilla Glass®. The TLP Pro 725M also features the convenience of PoE - Power over Ethernet, which allows it to receive power and communication over a single Ethernet cable.

- ▶ 7" capacitive touchscreen with 1024x600 resolution and 24-bit color depth
- ▶ Newly designed inside and out for the ideal balance of performance and style
- ▶ Gorilla Glass® screen is tough, scratch, and smudge-resistant
- ▶ Faster, quad-core processing and eight times more memory
- ▶ Compatible with all IP Link Pro control processors
- ▶ Power over Ethernet provides power and communication over a single Ethernet cable
- ▶ Light sensor adjusts screen brightness as the ambient room lighting changes


DESCRIPTION

The **TLP Pro 725M** is a 7" wall mount touchpanel that offers stellar performance and superior design. Inside, there's a powerful new quad-core processor and eight times more memory feeding the high resolution 1024 x 600 edge-to-edge glass capacitive touchscreen. The touchscreen, itself, is our most durable yet - built with scratch and smudge-resistant Corning Gorilla Glass. Outside you'll find a stylish, ergonomic enclosure that will complement any contemporary presentation environment.

A host of familiar features provides elegant, simple operation, while PoE, Power over Ethernet streamlines integration by allowing the touchpanel to receive power and communication over a single Ethernet cable.

All TouchLink Pro touchpanels can be customized using Extron GUI Designer software. This powerful interface design software offers ready-to-use templates for a wide variety of rooms and presentation environments.

PANEL DRAWINGS

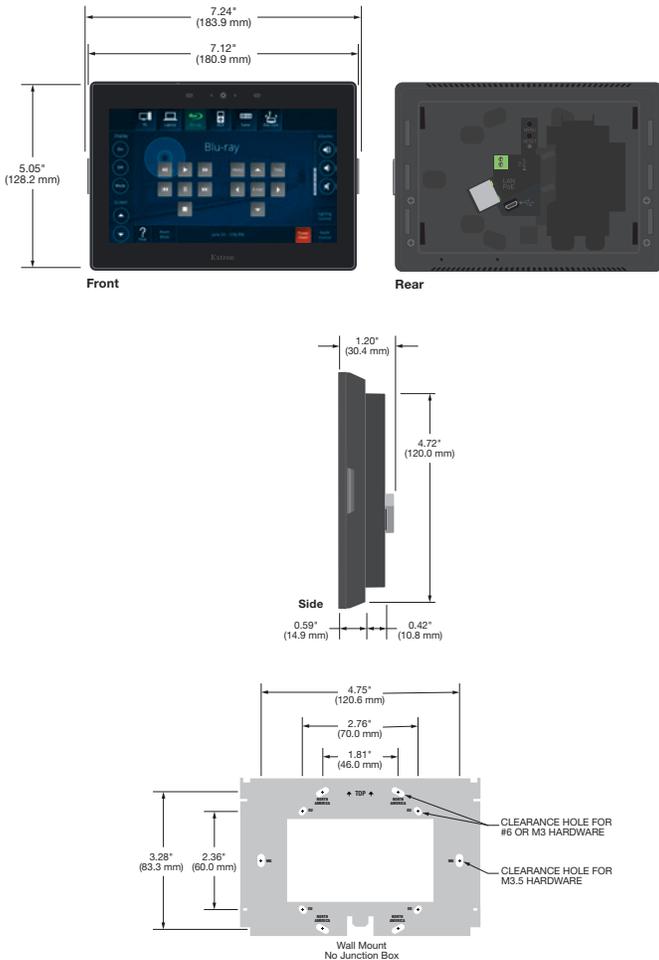

SPECIFICATIONS

DISPLAY		
Screen type	TFT Active matrix color LCD display	
Size	7" (17.8 cm), measured diagonally	
Resolution	1024x600	
Aspect ratio	Widescreen	
Color depth	24 bit, 16.7 million colors	
Contrast	700:1	
MEMORY		
SDRAM	2 GB	
Flash	4 GB	
COMMUNICATION – ETHERNET INTERFACE		
Ethernet data rate	10/100/1000Base-T, half/full duplex with autodetect	
Ethernet protocol	DHCP, DNS, HTTP, HTTPS, ICMP, SFTP, SSH, TCP/IP, UDP/IP	
Software		
Configuration software	Global Configurator Plus and Professional, GUI Designer	
Programming software	Global Scripter	
Control apps	Extron Control, iGVE	
Resource management software	GlobalViewer Enterprise, iGVE	
Utilities	Toolbelt, Embedded web page	
CONTROL – USB		
Number/signal type	1 high-speed USB 2.0 device	
USB standards	USB 2.0, USB 1.1, USB 1.0 compatible	
AUDIO OUTPUT		
Speaker output	1 mono, 89 dB Max. SPL @ 0.1 m	
Playback format(s)		
Container format	WAV (Microsoft RIFF)	
Encoding	LPCM (uncompressed)	
Audio channels	mono or stereo	
GENERAL		
Power input requirements	Power over Ethernet (PoE 802.3af, class 3)	
Auxiliary power output		
USB	5 VDC, 275 mA	
Temperature/humidity		
Storage: -4 to +158 °F (-20 to +70 °C) / 5% to 90%, noncondensing		
Operating: -4 to +158 °F (-20 to +70 °C) / 20% to 90%, noncondensing		
Mounting	Wall, furniture, or rack	
Enclosure dimensions		
5.05" H x 7.24" W x 1.20" D (128 mm H x 184 mm W x 30 mm D)		
Regulatory compliance		
Safety	CE, c-UL, UL	
EMI/EMC	CE, C-tick, FCC Class B, ICES, VCCI	
Environmental	Complies with the appropriate requirements of RoHS and WEEE.	
Warranty	3 years parts and labor; touchpanel display and overlay components are covered for 1 year	
Model	Version Description	Part number
TLP Pro 725M	Black - Wall Mount	60-1563-02
TLP Pro 725M	White - Wall Mount	60-1563-03
Optional Accessories		
Model	Version Description	Part number
RM 5	Rack Mount Kit for TLP Pro 725M	70-1137-02
SMK 5	TLP Surface Mount Kit - Black	70-1140-22
SMK 2	TLP Surface Mount Kit - White	70-1140-23
RWM 2	TLP Recessed Wall Mount Kit	70-1141-23

For complete specifications, please go to www.extron.com
Specifications are subject to change without notice.

WORLDWIDE SALES OFFICES

Anaheim • Raleigh • Silicon Valley • Dallas • New York • Washington, DC • Toronto • Mexico City • Paris • London
Frankfurt • Madrid • Stockholm • Amersfoort • Moscow • Dubai • Johannesburg • Tel Aviv • Sydney • Melbourne
Bangalore • Mumbai • New Delhi • Singapore • Seoul • Shanghai • Beijing • Hong Kong • Tokyo

www.extron.com