


Vocia® Page Active Relay Module (PARM-1) DATA SHEET

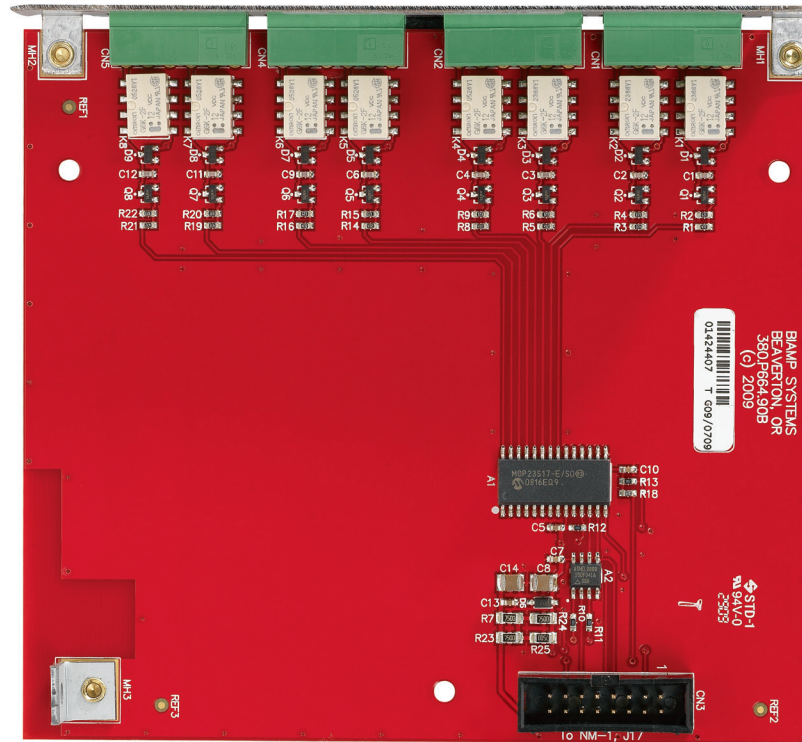

The PARM-1 Page Active Relay Module is an optional module for the VA-8600 amplifier. It provides a SPDT relay contact connection for each VA-8600 amplifier channel (total 8 relays). A relay will be energized when paging is active in the corresponding AM-600 amplifier channel.

FEATURES

- Allows control of external devices during paging (e.g. attenuator over-ride relays)
- Suitable for the VA-8600 Option Slot
- Powered from and controlled by the VA-8600
- Eight Relay circuits
- Connections via 3.5mm pluggable screw terminal blocks

ARCHITECTS & ENGINEERS SPECIFICATION

The relay module shall be designed exclusively for use with Biamp® Vocia® systems. It shall be mountable in the VA-8600 amplifier and provide eight SPDT relay contact connections. A relay shall be energized when paging is active on the corresponding AM-600 amplifier channel. The relay device shall be compliant with the RoHS directive. Covered by 5-year warranty.

The relay device shall be a Vocia PARM-1.

Vocia Page Active Relay Module (PARM-1) SPECIFICATIONS

| | | | |
|----------------------------|---|---|------------------------------|
| Number of relays: | 8 (one per VA-8600 Amplifier channel) | Weight: | approx. 3.5oz (100g) |
| Relay Contacts | | Ambient Operating Temperature Range: | 18°F to 108°F (-8°C to 42°C) |
| Type: | Single 'Form C' voltage-free SPST change-over contact | | |
| Load: | Resistive | | |
| Maximum operating voltage: | 125VAC, 60VDC | | |
| Maximum operating current: | 600mA AC, 1A DC | | |
| Base Dimensions: | | Compliance | CE marked RoHS Directive |
| Height: | 5.0" (128mm) | | |
| Width: | 1.2" (30.7mm) | | |
| Depth: | 4.65" (118mm) | | |

Vocia Page Active Relay Module (PARM-1) SIDE PANEL

